

07/07/00
 1c803 U.S. PTO

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 826.1611/JDH

First Named Inventor or Application Identifier:

Kenichiro SAKAI, et al.

Express Mail Label No.

(Only for new nonprovisional applications under 37 CFR 1.53(b))

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: **Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 62]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 15]
4. ☒ Oath or Declaration [Total Pages: 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

1c564 U.S. PTO
 09/612288
 07/07/00

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: 1
18. CORRESPONDENCE ADDRESS

STAAS & HALSEY LLP
 Attn: James D. Halsey, Jr.
 700 Eleventh Street, N.W., Suite 500
 Washington, DC 20001

Telephone: (202) 434-1500
 Facsimile: (202) 434-1501

APPLICATION FOR
UNITED STATES LETTERS PATENT
SPECIFICATION

Inventor(s): Kenichiro SAKAI and Tsugio NODA

Title of the Invention: DOCUMENT IMAGE CORRECTING DEVICE AND
A CORRECTING METHOD

Document Image Correcting Device and a Correcting Method

Background of the Invention

5 Field of the Invention

The present invention relates to an image input system, etc., and more particularly, to a device which automatically correcting an English document image that is input by using an image input device
10 such as a scanner, etc. to be a properly orientated image, and obtains a properly orientated document image, especially, by detecting as document correction methods a rotation, a rotational angle if the rotation is required, and mirror image flipping,
15 which are intended for correcting an input document image to be properly orientated, from the input document image after the rotation or the mirror image flipping.

20 Description of the Related Art

In recent years, a manual hand-held scanner which is small-sized and easy to carry has been developed and commercialized in addition to a stationary flat-bed scanner. With the hand-held
25 scanner, a user can perform scanning in an arbitrary

direction at a high degree of discretion. However, an image may sometimes be read as a rotated image or a mirror image depending on a scanning direction. Therefore, the image must be corrected by being
5 rotated or flipped back to the right-reading image.

With a conventional document image correcting device such as the one disclosed by Japanese Laid-open Patent Publication No. 8-212298, a character image is extracted from a scanned document image.
10 Character recognition is performed in four directions such as in 0-, 90-, 180-, and 270-degree directions. The direction in which the degree of the likelihood (accuracy) of recognition is the highest is determined to be the orientation of the document. If
15 the determined document orientation is not a correct orientation, the document image is corrected to be properly orientated (the orientation in which the image can be properly read as a document) by rotating the image.

20 Accordingly, with the conventional document image correcting device, character recognition cannot be made for a document image which is obtained by being scanned with a hand-held scanner and is flipped to a mirror image, if the character image which is
25 extracted from the document image is rotated by any

of the angles such as 0, 90, 180, and 270 degrees. As a result, its correct orientation cannot be determined, leading to a correction not being possible.

5

Summary of the Invention

An object of the present invention is to provide a document image correcting device and a method thereof, which automatically corrects a document
10 image (including a mirror image) to be a properly orientated image, and can reduce a processing load such as that on the rotation of a character image, etc., when a document is fundamentally limited to horizontal writing, for example, as in an English
15 document image represented by alphabets.

In the preferred embodiment according to the present invention, a document image correcting device comprises a line orientation determining unit, a character image extracting unit, a character
20 orientation detecting unit, and a document image correcting unit.

The line orientation determining unit determines whether the line orientation of an input document image is either vertical or horizontal. The character
25 image extracting unit extracts character images from

the input document image, for example, in units of characters. The character orientation detecting unit detects whether or not to require a rotation, a rotational angle if the rotation is required, and mirror image flipping, which are intended for correcting the character image extracted by the character image extracting unit to be properly orientated, in correspondence with the determination of the line orientation determining unit. The document image correcting unit corrects the input document image to be a properly orientated image based on the result of the detection made by the character orientation detecting unit.

In the preferred embodiment according to the present invention, the character orientation detecting unit may further comprise an image converting unit and a character recognizing unit. The image converting unit converts the character image extracted by the character image extracting unit to images which are rotated and/or flipped to a mirror image. The character recognizing unit performs character recognition for the converted character images, and outputs their character codes and the degrees of likelihood of the recognition. The character orientation detecting unit detects whether

or not to require the rotation, the rotational angle if the rotation is required, and the mirror image flipping, which are intended for correcting a character image to be properly orientated, based on the result of the recognition made by the character recognizing unit.

Also in the preferred embodiment according to the present invention, the document image correcting device may further comprise a language identifying unit identifying the language of an input document image. With this unit, the document image correcting device can correct an input document image to be a properly orientated image in correspondence with the result of the determination made by the language identifying unit.

In the preferred embodiment of the present invention, the character orientation detecting unit excludes some of, for example, one half of 8 patterns including a plurality of patterns obtained by rotating a character image within a input document image and/or flipping the image to a mirror image, and an image which is unchanged from the character image, and uses the remaining patterns in correspondence with the result of the determination made by the line orientation determining unit, so

that the unit can detect whether or not to require the rotation, the rotational angle if the rotation is required, and the mirror image flipping, which are intended for correcting the character image extracted by the character image extracting unit, to be properly orientated.

According to another preferred embodiment of the present invention, the document image correcting device may also comprise a line orientation determining unit, a line image extracting unit, a character orientation detecting unit, and an image correcting unit. The operations of the line orientation determining unit and the document image correcting unit are fundamentally the same as those described above.

The line image extracting unit extracts the whole or part of one line from an input document image as a line image. The character orientation detecting unit detects whether or not to require the rotation, the rotational angle if the rotation is required, and the mirror image flipping, which are intended for correcting the character image within the extracted line image to be properly orientated, in correspondence with the result of the determination made by the line orientation

determining unit.

Also in this preferred embodiment, the character orientation detecting unit may further comprise an image converting unit and a character recognizing unit. The image converting unit rotates the character image within the extracted line image and/or flips the character image to a mirror image in correspondence with the result of the determination made by the line orientation determining unit. The character recognizing unit performs character recognition for the converted character images, and outputs the character codes corresponding to the respective character images within the line image and the degrees of likelihood of the recognition. The character orientation detecting unit detects whether or not to require the rotation, the rotational angle if the rotation is required, and the mirror image flipping, which are intended for correcting the character image within the extracted line image to be properly orientated, based on the result of the recognition made by the character recognizing unit.

In this preferred embodiment according to the present invention, the character orientation detecting unit can also detect a character image type as a properly orientated character image, if the

character image type has a highest mean degree of likelihood of recognition performed by the character recognizing unit for the character images within each line image among character images types within the line image, to which the image converting unit converts the characters within the line image with different conversion methods, and if a preset number or more of predetermined character codes are included among the character codes corresponding to the character images within the line image.

Additionally, with a document image correcting method according to a preferred embodiment of the present invention, whether the line orientation of an input document image is either vertical or horizontal is determined, whether or not to require the rotation, the rotational angle if the rotation is required, and the mirror image flipping, which are intended for correcting the character image extracted from the input document image to be properly orientated, is detected in correspondence with the result of the determination, and the input document image can be corrected to be a properly orientated image based on the result of the detection.

Furthermore, a storage medium according to a preferred embodiment of the present invention, which

is used in a document image correcting device and stores a program for causing a computer to perform a process, said process comprising the steps of: determining whether the orientation of an input document image is either vertical or horizontal; detecting whether or not to require the rotation, the rotational angle if the rotation is required, and the mirror image flipping, which are intended for correcting a character image extracted from the input document image to be properly orientated, in correspondence with the result of the determination; and correcting the input document image to be a properly orientated image based on the result of the detection.

According to the present invention, as described above, after whether the line orientation of an input document image is either vertical or horizontal is first determined, the correction process for an input document image is performed. The present invention targets a document image the text of which is not vertically written in normal cases, for example, an English document image. When the line orientation of an input document image is determined to be vertical, the document image is corrected to be a properly orientated image after the characters within the

document image are rotated by 90 degrees and the document image is changed to an image the line orientation of which is horizontal.

Normally, when a document image is scanned in an arbitrary direction such as upward, downward, right or left, for example, with a hand-held scanner, 8 pattern images which are rotated and/or flipped to a mirror image are obtained depending on the orientation of the scanner head. For example, if there is a vertically written document such as a Japanese document that is represented by Chinese characters and kana being the Japanese syllabic script, the process for correcting a document image to be a properly orientated image must be performed for the 8 pattern images. However, for an English document, its patterns to be processed can be reduced to 4 by performing the process for correcting a document to be a properly orientated image after rotating the input character images by 90 degrees, when the line orientation of the document is determined to be vertical. As a result, the processing time can be reduced.

Brief Description of the Drawings

The features and advantages of the present

invention will be more clearly appreciated from the following description taken in conjunction with the accompanying drawings in which like elements are denoted by like reference numerals and in which:

5 Fig. 1 is a block diagram showing the principle of the configuration according to the present invention;

10 Fig. 2 is a block diagram showing the entire configuration of a document image correcting device according to the present invention;

 Fig. 3 explains the directions in which a document image is scanned with a hand-held scanner;

15 Fig. 4 exemplifies the images captured in correspondence with the scanning directions shown in Fig. 3;

 Fig. 5 explains the detection of the orientation of a character image if the line orientation of an input document image is vertical;

20 Fig. 6 explains the detection of the orientation of a character image if the line orientation of an input document image is horizontal;

 Fig. 7 is a flowchart showing the entire process for automatically correcting an English document image;

25 Fig. 8 is a flowchart showing the details of the

process for identifying English;

Fig. 9 explains an interval between English character images and a character width of an English character image;

5 Fig. 10 shows the mean values of the intervals between characters, the character widths, and the black pixel ratios in English and Japanese document images;

10 Fig. 11 is a flowchart showing the process for identifying English by using the difference between character intervals;

Fig. 12 is a flowchart showing the details of the process for automatically correcting a document image by extracting each character image;

15 Fig. 13 explains character codes as character recognition results, and the degrees of likelihood of character recognition;

20 Fig. 14 is a flowchart showing the details of the process for automatically correcting a document image to be a properly orientated image by extracting a line image; and

25 Fig. 15 explains the loading of a program for implementing the document image correcting device according to the present invention as a computer system into a computer.

Description of the Preferred Embodiments

A preferred embodiment according to the present invention is explained by mainly referring to the process for correcting a document image in a language which is normally written horizontally and is seldom written vertically, such as English, German, Russian, and the like, which are represented by alphabets. For a document image in a language which is seldom written vertically, the correlationship between the line and character orientations of an input image becomes closer.

In this preferred embodiment, if a document image is, for example, an English document image, limitations are imposed on a character rotation direction when a character orientation is determined, and the like by using this nature. Namely, if the line orientation of an input image is vertical, the number of patterns for which character recognition is to be performed can be reduced by determining the character orientation after rotating the input image by 90 degrees beforehand. This is the premise of the present invention.

Fig. 1 is a block diagram showing the principle of the configuration according to the present invention. This figure shows the principle of the

configuration of the document image correcting device which corrects to be a properly orientated image a document image which is input by being rotated and/or flipped to a mirror image, for example, with the use of a hand-held scanner.

In Fig. 1, a line orientation determining unit 1 determines whether the line orientation of an input document image is either vertical or horizontal. A character image extracting unit 2 extracts character images from an input document image, for example, in units of characters.

A character orientation detecting unit 3 detects whether or not to require the rotation, the rotational angle if the rotation is required, and the mirror image flipping, which are intended for correcting a character image to be properly orientated, in correspondence with the result of the determination made by the line orientation determining unit 1, for example, as it is if the line orientation is horizontal, or after rotating the character image extracted by the character image extracting unit 2 if the line orientation is vertical. A document image correcting unit 4 corrects the input document image to be a properly orientated image based on the result of the detection made by

the character orientation detecting unit 3.

According to the present invention, as described above, the process for correcting an input document image is performed after determining whether the line orientation of the input document image is either vertical or horizontal. The present invention targets a document image the text of which is not written vertically in normal cases, such as an English document image. If the line orientation of an input document image is determined to be vertical, the process for correcting a document image to be a properly orientated image is performed after the document image is converted to an image the line orientation of which is horizontal by rotating the characters within the input document image by 90 degrees.

Normally, when a document image is scanned in an arbitrary direction such as upward, downward, right, or left, for example, with a hand-held scanner, 8 pattern images, which are rotated and/or flipped to a mirror image depending on the orientation of the head, are obtained. Assuming that a vertically written document such as a Japanese document represented by Chinese characters and kana exists, the process for correcting a document image to be a

properly orientated image must be performed for the 8 pattern images. However, for an English document, the patterns to be processed can be reduced to 4 by performing the process for correcting an input document image to be a properly orientated image after rotating input character images by 90 degrees, when the line orientation is determined to be vertical. Consequently, the processing time can be reduced.

Fig. 2 is a block diagram showing the entire configuration of the document image correcting device according to the preferred embodiment of the present invention. In the preferred embodiment according to the present invention, as described above, a document image in a language which is normally written horizontally and is seldom written vertically, such as an English document image, is targeted, its line orientation is detected, the orientation of the character images is detected according to the result of the detection, and the document image is corrected in correspondence with the orientation of the character images. Note that a character image indicates an image obtained by extracting a rectangular area which circumscribes a character.

In Fig. 2, an image storing unit 11 is intended

to store a document image input by a scanner. An English identifying unit 12 is intended to identify whether or not the language of the document image is English. A line orientation detecting unit 13 is
5 intended to detect whether the line orientation of the input image is either vertical or horizontal.

A document orientation detecting unit 14 detects the orientation of characters, namely, whether or not to require the rotation, the rotational angle if the
10 rotation is required, and the mirror image flipping, which are intended for correcting the characters within the input image to be properly orientated, in correspondence with the result of the detection made by the line orientation detecting unit 13, if the
15 language of the input document image is determined to be English by the English identifying unit 12. Assuming that the line orientation detected by the line orientation detecting unit 13 is vertical, the document orientation detecting unit 14 detects the
20 orientation of the characters after rotating the input image by 90 degrees. An image correcting unit 15 corrects the image stored in the image storing unit 11 in correspondence with the result of the detection made by the document orientation detecting
25 unit 14, namely, the rotational angle for correcting

the characters within the input image and the result of the detection of whether or not to require the mirror image flipping, and outputs the corrected image as a properly orientated image.

5 Here, the scanning directions of a hand-held scanner and the images input by the scanner are explained by referring to Figs. 3 and 4. As shown in (1) through (8) of Fig. 3, a document image can be scanned in any direction such as upward, downward,
10 right, or left with a hand-held scanner. Accordingly, if scanning is performed in the directions other than the direction shown in (1) of Fig. 3, a character image may be read as a rotated image and/or a mirror image depending on a scanning direction.

15 For example, if a properly orientated character "a" exists in the document, and if this character is scanned in the directions shown in (1) through (8) of Fig. 3, images to be captured are like those shown in (1) through (8) of Fig. 4. Assuming that the
20 scanning is performed as shown in (3) of Fig. 3, the upper portion of the character image is captured unchanged as that of the input image. However, since the scanner head exists on the right side, the right portion of the document image is captured first. As
25 a result, the right portion of the document image

becomes the left portion of the input image. Therefore, the mirror image in which the right and left portions of the document image are flipped is captured as the input image.

5 Among the total of 8 image patterns including the character image extracted unchanged from the image input by the scanner, and the images obtained by rotating the extracted character image by 90, 180, and 270 degrees, and/or by flipping to a mirror
10 image, there is a strong possibility that a properly orientated image is included. This depends on the operational direction of the scanner, though.

 Speaking of the image itself input by the scanner, the 8 patterns shown in (1) through (8) of
15 Fig. 4 exist as the states of that character image, even if the document image is an English document. However, a normal English text is not vertically written. As indicated by an arrow in the upper portion of Fig. 3, the line orientation is
20 horizontal. Originally, there is a very slight possibility that the images shown in (5) through (8) of Fig. 4 exist in an English document. If the line orientation of the input image is vertical, the characters within the input image will be like any of
25 the images (5) through (8). However, a document the

line orientation of which is vertical does not exist in normal English writing. Accordingly, when the line orientation of an input document image which is not written vertically as in an English document is determined to be vertical, the input image is corrected after being rotated by 90 degrees when the line orientation of the image is determined to be vertical. For the same reason, the input image is not rotated by 90 degrees if the line orientation of the input image is horizontal. The resultant character images become only the 4 states shown in (1) through (4) of Fig. 4. Therefore, also the character orientation may be detected only for these 4 patterns.

In the preferred embodiment according to the present invention, the line orientation is detected prior to the correction of, for example, an English document image as explained by referring to Fig. 2. If the detected line orientation is vertical, an input image is corrected after being rotated by 90 degrees beforehand for the sake of convenience of character recognition processing. In this way, the 8 patterns shown in Fig. 4 can be reduced to 4, whereby also the processing time taken to make a correction can be halved in comparison with, for example, the

time taken to correct a Japanese document image represented by Chinese characters and kana.

The line orientation of an image input by a scanner becomes vertical when scanning is performed in the direction parallel to the lines. That is, this is the case where a scanner is moved from the right to the left or vice versa as shown in (5) through (8) of Fig. 3, assuming that an operator is facing an English document to be scanned. At this time, the states of the input image will be the 4 patterns shown in (5) through (8) depending on whether the scanner head is oriented either upward or downward.

In the meantime, the line orientation of the image input by the scanner becomes horizontal when scanning is performed by moving the scanner from upward to downward or vice versa as shown in (1) through (4) of Fig. 3, assuming that the operator is present at the same position. The image patterns the line orientation of which becomes horizontal are the 4 patterns shown in (1) through (4) depending on whether the scanner head is oriented either the left or the right.

As described above, according to the preferred embodiment of the present invention, whether the line orientation is either vertical or horizontal is first

determined for an input document image. Since its method is known, its explanation is omitted here. There is no need to use a specific method as this method. For example, with the methods disclosed by Japanese Patent Publication Nos. 11-25213 and 11-25217, 3-4386, etc, the line orientation can be detected.

The orientation detection of a character image, which is performed when the line orientation of an input image is both vertical and horizontal, is explained by referring to Figs. 5 and 6. Fig. 5 explains the orientation detection of a character image when the line orientation is vertical. An image (A) of Fig. 5 is part of an image input by a scanner, and the line orientation of the input image is vertical. In this case, a character image (B) extracted from the input image is first rotated by 90 degrees, and an image (C) is obtained. Then, an image (D) obtained by flipping the character image (C) to a mirror image where the right and left portions are reversed, an image (E) obtained by rotating the character image (C) by 180 degrees, and an image (F) obtained by rotating the character image (C) by 180 degrees and flipping the rotated image are obtained on the basis of the character image (C), so that the

4 images can be obtained as character recognition targets.

There is a strong possibility that a properly orientated image is included among these 4 images (C) through (F), although this depends on the operational direction of the scanner. In the case shown in Fig. 5, (D) is a properly orientated image. Character recognition is made for these 4 images, and the characters resultant from the recognition and the degrees of likelihood of the recognition are obtained. The maximum value of the degree of likelihood is defined to be 999 in this preferred embodiment according to the present invention. As a result of the recognition, the character image (D) is recognized to be a character "a", and its degree of likelihood is obtained to be 998.

Fig. 6 explains the detection of the orientation of the character image if the line orientation of the input image is horizontal. If the line orientation is horizontal, the extracted character image is recognized to be a character image (B) unchanged as a basis, unlike in Fig. 5. Namely, a mirror image (C) obtained by flipping the right and the left portions of the character image (B), an image (D) obtained by rotating the character image (B) by 180 degrees, and

an image (E) obtained by rotating the character image (B) by 180 degrees and flipping the rotated image are obtained. Character recognition is then performed for these 4 character images. Here, the image (E) is
5 obtained as a properly orientated image.

As described above, In this preferred embodiment, orientation detection is made after an input image is rotated by 90 degrees if the line orientation of the input image is vertical, based on
10 the premise that an English document is not vertically written.

Next, the process for correcting a document image in the preferred embodiment of the present invention will be further described in detail. Fig.
15 7 is a flowchart showing the entire process for automatically correcting an English document image. In this figure, in step S1, whether or not an input image is an English document is first determined. In step S2, the process is terminated if the input image
20 is not an English document as a result of the above described determination. However, a different correction process may be performed at this time. If the input image is an English document image, the process for automatically correcting the orientation
25 of an English document image is performed in step S3

after the determination process in step S2. The process is then terminated.

Fig. 8 is a flowchart showing the English identification process performed by the English identifying unit 12. Once the process is started in this figure, the value of "i" indicating the number of characters extracted from an input image is initialized to "0" in step S11. Then, in step S12, the rectangular area of an i-th character image within the input image is detected. In step S13, a black pixel ratio B_i and a character width W_i of the character image within the rectangular area, and an interval S_i between this character image and the next character image are obtained. The value of "i" is incremented in step S14, and whether or not this value reaches "M" is determined in step S15. Here, "M" is the number of character images used to identify whether or not a document image is English. If the value of "i" does not reach "M", the operations in and after step S12 are repeated.

In this preferred embodiment, the black pixel ratio and the character width of a character image, and the character interval between the character image and the next character image, which are obtained in step S13, are used to identify whether or

not the language of an input document image is English. Fig. 9 exemplifies the character interval and width.

Fig. 10 shows the mean values of character intervals, character widths, and black pixel ratios of English and Japanese document images, when the documents are input by a scanner at 400-dpi (dots per inch) resolution. The black pixel ratio is a ratio of pixels structuring a character to the total number of pixels within the character image. If the mean values of the character intervals, the character widths, and the black pixel ratios of the Japanese and English documents are taken as the threshold values for identifying the difference between English and Japanese, the values in the bottom line in Fig. 10 can be used as the threshold values. By comparing with the threshold values, whether the language of an input document image is either English or Japanese can be identified.

Turning back to Fig. 8. If the value of "i" being the number of characters extracted from the input image is determined to become equal to "M" being the number of characters used to identify English in step S15, the respective mean values B_a , W_a , and S_a of the black pixel ratio B_i , the character

width W_i , and the character interval S_i are calculated for the "M" character images in step S16. In step S17, the value of "n" indicating the number of conditions under which the document is determined to be English among the 3 identification conditions, which respectively correspond to the black pixel ratio, the character width, and the character interval, is initialized to "0".

Then, in step S18, whether or not the mean value B_a of the black pixel ratio is equal to or larger than a threshold value TH_B is determined. If the mean value B_a is equal to or larger than the threshold value TH_B , the value of "n" is incremented in step S19. If the mean value B_a is smaller than the threshold value TH_B , the process immediately goes to step S20.

In step S20, whether or not the mean value W_a of the character width is equal to or smaller than a threshold value TH_W is determined. If the mean value W_a is equal to or smaller than the threshold value TH_W , the value of "n" is incremented in step S21. If the mean value W_a is larger than the threshold value TH_W , the process immediately goes to step S22. In step S22, whether or not the mean value S_a of the character interval is equal to or smaller than a

threshold value TH_S is determined. If the mean value Sa is equal to or smaller than the threshold value TH_S, the process goes to step S24 after the value of "n" is incremented in step S23. If the mean value Sa is larger than the threshold value TH_S, the process immediately goes to step S24.

Then, in step S24, whether or not the number "n" of the conditions under which the document is determined to be English is 2 or more among the three identification conditions is determined. If the value of "n" is equal to or larger than 2, the language of the document is determined to be English in step S25. If the value of "n" is not equal to or larger than 2, the language is determined not to be English in step S26. The process is then terminated. Note that in the example of Fig. 10, the threshold values of the black pixel ratio, the character width, and the character interval are respectively 42 percent, 33 pixels, and 4 pixels.

Here, a comparison is made between character spacing in English and Japanese documents. Characters are spaced in a row at nearly identical intervals in the Japanese document, whereas characters are spaced at different intervals between words and between characters within a word in the English document.

This is because the English document is structured by words, each of which is composed of a plurality of characters. For a Japanese document image, character intervals of 3 to 15 pixels or so are consecutively detected if character intervals are viewed from the first character. In the meantime, in an English document, narrow character intervals of 1 to 5 pixels or so are consecutively detected from characters within a word, and a wide character interval of 11 pixels or so, which indicates the interval between the last character of the word and the first character of the next word, then appears. Note that the above described numbers of pixels in the character intervals are one example when the documents are read by a scanner at 400-dpi resolution.

By using such differences between the character intervals, the English identification process can be also performed. Fig. 11 is a flowchart showing the English identification process performed in such a case. Once the process is started, the value of "i" is initialized to "0" in step S31 in a similar manner as in step S11 of Fig. 8. In step S32, the rectangular area of an i-th character image is detected in a similar manner as in step S12. In step

S33, the character interval S_i to the next character image is obtained. The value of "i" is incremented in step S34, and whether or not this value reaches the above described value of "M" is determined in step S35. If the value of "n" does not reach "M", the operations in and after step S32 are repeated.

If the value of "i" is determined to reach "M" in step S35, the value of a distribution "V" of the character intervals S_1 through S_M is calculated in step S36. In step S37, whether or not the value of the distribution "V" is equal to or larger than a threshold value TH_V is determined. If this value is equal to or larger than the threshold value TH_V , a language is determined to be English in step S38. If the value of "V" is not equal to or larger than the threshold value TH_V , the language is determined not to be English in step S39. The process is then terminated.

To identify whether or not a language is English, the value of the distribution between character intervals is used in Fig. 11. The more the original numeric values disperse, the larger the distribution value becomes. The less the numeric values disperse, the smaller the distribution value becomes. Therefore, the nature such that the

distribution value becomes smaller if character intervals disperse narrowly as in a Japanese document, and that character intervals between characters within a word and between words disperse widely as in an English document is used. By comparing with a predetermined distribution threshold value, English is identified.

Fig. 12 is a flowchart showing the process for automatically correcting a document image to be a properly orientated image by extracting character images from an English document image in units of characters, and by detecting whether or not to require the rotation, the rotational angle if the rotation is required, and the mirror image flipping, which are intended for correcting a document image to be properly orientated. This flowchart mainly corresponds to the processes performed by the document orientation detecting unit 14 and the image correcting unit 15, and the process in step S3 of Fig. 7.

Once the process is started in this figure, the line orientation of an input image is detected in step S41. In step S42, the value of "j" indicating the number of characters extracted to be used for orientation detection, and the values of D1 through

D4 as variables for counting characters detected to be properly orientated images among the 4 images which are explained by referring to Figs. 5 and 6. are initialized to "0". If E1 (the method for converting a character image to E1) is detected as a method for correcting a character image to be a properly orientated image, the value of D1 is incremented. If any of the methods for converting a character image to E2 through E4 is detected as a method for correcting a character image to be a properly orientated image, any of D1 through D4 is incremented.

In step S43, one character image E1 is extracted from the input image. The process for extracting a character image is, for example, the one performed in step S12 of Fig. 8. With the result of this process, the need for performing an actual character extraction process in step S43 is eliminated.

In step S44, whether or not the line orientation is vertical is determined in correspondence with the result of the line orientation detection made in step S41. If the line orientation is determined to be vertical, the process goes to step S46 after the character image E1 is rotated by 90 degrees in step 45. If the line orientation is determined not to be

vertical, the process immediately goes to step S46.

In step S46, whether or not the ratio of the long side to the short side of the character image E1 (here, also a character image which is rotated by 90 degrees is assumed to be a symbol E1 for ease of explanation) is smaller than 2 is determined. By selecting as an orientation detection target only a character image the ratio of which is smaller than a predetermined value obtained by dividing the length of the long side by that of the short side of the character image, 2 in this case, an image where two characters are linked or part of a graphic can be prevented from being extracted incorrectly as a character image. Accordingly, if the ratio of the character image E1 is not smaller than 2 in step S46, the orientation is not detected from the character image. The value of "i" is incremented in step S57. If the value of "j" does not reach "N" which indicates the number of images to be extracted, according to which the character image correction process must be aborted in step S58, the operations in and after step S43 are repeated.

If the ratio of the long side to the short side is smaller than 2 in step S46, whether or not the black pixel ratio is within the range from 42 to 80

percent is determined in step S47. If this ratio is outside the range, the process goes to step S57. Here, 47 percent is the threshold value explained by referring to Fig. 10. Additionally, if an image which is too black, it can possibly be a blot or part of a graphic. Therefore, the orientation is not detected from the character image the black pixel ratio of which is equal to or higher than 80 percent.

If the black pixel ratio is within the range from 42 to 80 percent, an image E2 obtained by flipping the character image E1 to a mirror image, an image E3 obtained by rotating the character image E1 by 180 degrees, and an image E4 obtained by rotating the character image E1 by 180 degrees and flipping the rotated image are generated in step S48. Then, character recognition is performed for the images E1 through E4 in step S49. Character codes C1 through C4 as recognition results and the degrees of likelihood of the recognition K1 through K4 are obtained.

Here, the character codes as the recognition results and the degrees of likelihood are explained by referring to Fig. 13. In Fig. 13, one input character image or an image E1 obtained by rotating the character image by 90 degrees, an image E2 obtained by flipping E1 to a mirror image, an image

E3 obtained by rotating E1 by 180 degrees, and an image E4 obtained by rotating E1 by 180 degrees and flipping the rotated image are obtained. Then, character codes C1 through C4 resultant from the recognition performed for these images, and their
5 degrees of likelihood K1 through K4 are obtained.

Turning back to Fig. 12. In step S50, it is determined whether or not 2 or more of the 4 degrees of likelihood K1 through K4 are equal to or higher
10 than a predetermined threshold value TH_K of the degree of likelihood. In this preferred embodiment, an extracted character image itself can possibly be distorted, or an extracted image is not a character but can possibly be an image for which character
15 recognition cannot be originally performed, such as part of a graphic, etc.

Character orientation such as a rotational angle, etc. cannot be detected from such images. Therefore, if all of the 4 degrees of likelihood resultant from the character recognition performed
20 for the 4 images that are obtained by being rotated and/or flipped are lower than the predetermined threshold value, it is determined that the character recognition cannot be performed, and the orientation
25 is not detected from the input image. As a result,

the orientation detection accuracy is improved.

Additionally, symmetrical character images such as "A" or "T" are recognized to the same characters even if they are flipped to mirror images. Therefore, the degrees of likelihood resultant from the character recognition performed for 2 of the 4 images corresponding to such images may become high to the same extent. Accordingly, if the degrees of likelihood resultant from the character recognition performed for 2 or more images are equal to or higher than a threshold value among the 4 character images which are obtained by rotating a character image extracted from an input image or by flipping the extracted character image to a mirror image, the orientation detection accuracy can be improved by eliminating the detection of the orientation from the input image.

If 2 or more of the degrees of the likelihood are higher than the threshold value in step S50, the process goes to step S57. If the number of extracted character values does not reach "N", the operations in and after step S43 are repeated.

If 2 or more of K1 through K4 are not equal to or higher than the threshold value, namely, if 0 or 1 of K1 through K4 is equal to or higher than the

threshold value, the maximum value of K1 through K4 is detected and is defined to be Km ("m" is any of 1 through 4) in step S51. In step S52, whether or not the value of Km is equal to or higher than the threshold value is determined. If the value of Km is not equal to or higher than the threshold value, all of the 4 degrees of likelihood are lower than the threshold value. Therefore, control is transferred to the operations in and after step S57.

10 If the value of Km is equal to or higher than the threshold value in step S52, the degree of likelihood which is equal to or higher than the threshold value is only Km. Then, it is determined whether or not a character code Cm corresponding to Km is a code corresponding to an English character in step S53. If Cm is not a code corresponding to an English character, it is inadequate to detect the orientation from the character image. This is because the process for automatically correcting an English document image is intended to be performed here. The process then goes to step S57 and subsequent steps.

20 If the character code Cm is a code corresponding to an English character in step S53, it is determined whether or not Cm is a code corresponding to a particular character. Here, a character the

orientation of which cannot possibly be detected, such as "A" or "T", may be specified as a particular character, whereby the orientation detection accuracy can be improved. If the character code C_m matches
 5 such a particular character code, the process goes to step S57 and subsequent steps.

If the character code C_m is not a particular character code in step S54, the value of D_m corresponding to K_m being the maximum value of K_1
 10 through K_4 is incremented among the variables D_1 through D_4 for counting the above described correcting methods in step S55. In step S56, whether or not the value of D_m reaches 2. If the value of D_m is 2, it means that the method corresponding to D_m is
 15 determined to be a correction method to be executed for obtaining a properly orientated image among the 4 correction methods resultant from the rotation or the flipping to a mirror image for 2 of the extracted input images. The variable that first reaches 2 among
 20 D_1 through D_4 is adopted for all of other characters within the image as a conversion method for a correction. If the value of D_m is determined not to reach 2, the operations in and after step S57 are repeated.

25 If the value of D_m is determined to reach 2 in

step S56, the same conversion method as that for converting the input image E1 to the image Em, namely, the rotation and/or flipping to a mirror image are executed for the input image. The process
5 is then terminated. The reason why the value of Dm is set to 2 as a condition is that an incorrect orientation can possibly be detected if the value of Dm is set to 1, and a processing time increases if the value is 3. However, if precedence is given to
10 the detection accuracy over the processing time, the value of Dm may be set to 3 or more.

In step S59, a document image that is corrected to be a properly orientated image can be obtained by applying to the input image the same conversion
15 method as that for converting the image E1 to the image Em. That is, the image E2 is an image obtained by flipping the image E1 to a mirror image if "m" equals 2, and a properly orientated image can be obtained by flipping the input image to a mirror
20 image. Additionally, since the image E3 is an image obtained by rotating the image E1 by 180 degrees if "m" equals 3, a properly orientated image can be obtained by rotating the input image by 180 degrees. If "m" equals 4, the image E4 is an image obtained by
25 rotating the image E1 by 180 degrees, and by flipping

the rotated image to a mirror image. Therefore, a properly orientated image can be obtained by rotating the input image, and by flipping the rotated image back from the mirror image. Because the input image or the image after being rotated by 90 degrees is a properly orientated image if "m" equals 1, there is no need to perform conversion for a correction. Note that if the line orientation is vertical, the character image E1 is rotated by 90 degrees in step S45. Therefore, the rotation must be performed by 90 degrees corresponding to this rotational angle regardless of "m" in step S59.

If "j" and "N" become equal in step S58, the detection process is terminated. This means that the process is aborted so as not to take a processing time too long if the proper orientation is uneasy to be detected from a character image. With the above described process, an input English document image is automatically corrected to be a properly orientated image.

Fig. 14 is a flowchart showing the process for automatically correcting a document image to be a properly orientated image in units of lines by extracting the whole or part of a line from an English document image, and by detecting whether or

not to require a rotation, a rotational angle if the rotation is required, and mirror image flipping, which are intended for correcting a document image to be properly orientated. This flowchart are mainly the processes performed by the document orientation
 5 detecting unit 14 and the image correcting unit 15, which are shown in Fig. 2, and corresponds to step S3 of Fig. 7.

In this flowchart, "j" indicates the number of
 10 line images extracted to be used for orientation detection, E1 is an image that is extracted from an input image, and E2 through E4 are images that are respectively obtained by flipping E1 to a mirror image, by rotating E1 by 180 degrees, and by rotating
 15 E1 by 180 degrees and flipping the rotated image to a mirror image. K1 through K4 are mean values of the degrees of likelihood for the respective line images E1 through E4, which are obtained by performing character recognition for pluralities of characters
 20 within the respective line images E1 through E4. "L" is the number of characters simply obtained by performing character recognition for the line images. Character codes that are obtained by performing the character recognition for the characters within the
 25 line images E1 through E4 are respectively

represented by "C1, 1 to C1, L", "C2, 1 to C2, L",
 "C3, 1 to C3, L", and "C4, 1 to C4, L". "D1" to "D4"
 are the same variables used in Fig. 12. "N" indicates
 the number of extracted line images, according to
 5 which the detection must be aborted.

The fundamental process flow is the same as that
 in Fig. 12 except that the process is performed in
 units of line images in Fig. 14, while the
 orientation detection process is performed in units
 10 of character images in Fig.12. Contents of the steps,
 which are different from those in Fig.12, are
 explained below.

In step S63, the whole or part of one line is
 extracted from an input document image as a line
 15 image, and the extracted line image is defined to be
 E1. In step S65, the line image E1 is rotated by 90
 degrees if the line orientation is vertical.

In step S66, on the basis of the input line
 image or the image E1 obtained by rotating the input
 20 line image by 90 degrees, an image E2 obtained by
 flipping E1 to a mirror image, an image E3 obtained
 by rotating E1 by 180 degrees, and an image E4
 obtained by rotating E1 by 180 degrees and flipping
 the rotated image to a mirror image are generated.

25 In step S67, character recognition is performed

for the characters within the line images E1 through E4. Since each of the line images includes a plurality of character images, the mean degrees of likelihood K1 through K4 are obtained for the
 5 respective line images E1 through E4. Additionally, character codes "C1, 1 to C1, L", "C2, 1 to C2, L", "C3, 1 to C3, L", and "C4, 1 to C4, L" are obtained for the respective line images.

The following process is the same as that in
 10 Fig. 12. For example, in step S71, it is detected whether or not 2 or more character codes corresponding to predetermined characters, for example, "A", "T", and the like are included in the character codes "Cm, 1 to Cm, and L" within the line image Em
 15 having the highest mean degree of likelihood. If 2 or more character codes corresponding to predetermined characters are included, the process goes to step S75. If 2 or more character codes are not included, the process goes to step S72. By continuing such a
 20 process, an input English document image is automatically corrected.

If the mean degree of likelihood of an image obtained by rotating an input line image or by flipping the input line image to a mirror image is
 25 low, many characters that are not correctly

recognized may be included, and there is a strong possibility that a correct orientation cannot be detected. Accordingly, if all of the mean degrees of likelihood of the respective images E1 through E4 are
5 lower than a predetermined threshold value, the orientation is not detected from the corresponding line images.

Furthermore, orientation is not detected from corresponding lines also if there are plural number
10 of the mean degrees of likelihood, which exceed the predetermined threshold value. These are the same as those in Fig.12.

The above provided explanation refers to the preferred embodiments according to the present
15 invention by targeting a document image the text of which is not written vertically in normal cases such as an English document image. However, if a user manually switches a document image correcting device, and targets a document image such as an English
20 document, it is also possible to perform the rotation and character recognition processes by targeting only the 4 patterns among the 8 patterns shown in Fig.4, and to perform the rotation and recognition processes by targeting all of the 8 patterns shown in Fig.4
25 when targeting a document image in a language that is

also written vertically, for example, a document image in Japanese represented by Chinese characters and kana.

Explained last is the loading of a program into
5 a computer, which is intended to implement the document image correcting device as a computer system, in the preferred embodiments according to the present invention. Programs recited in claims 16 and 17 of the present invention, and the flowcharts shown
10 in Figs.7, 8, 11, 12, and 14 are stored, for example, in a memory 25 such as a RAM, a hard disk, etc. of a computer 21. The programs are executed by a main body 24, so that the document image correcting device according to the present invention is implemented.

15 The programs for implementing the document image correcting device according to the present invention may be loaded into the computer 21 from a program provider side via a line 32, or may be stored in a portable storage medium 22 which is normally
20 distributed, and loaded by the computer 21, so that the programs can be executed.

As the memory 25, for example, a ROM, a magnetic disk, an optical disk, a magneto-optical disk, etc. may be used. As the portable storage medium, an
25 arbitrary computer-readable storage medium such as a

memory card, a floppy disk, a CD-ROM, an optical disk, a magneto-optical disk, etc. may be used.

The distinguished features of the present inventions are listed below.

- 5 (1) The character image extracting unit according to the present invention selects and extracts a character image the black pixel ratio of which is within a predetermined range.
- (2) The character image extracting unit selects and
10 extracts a character image the ratio of a long side to a short side of which is within a predetermined range.
- (3) The character orientation detecting unit detects
15 as a properly orientated character image the image having the highest degree of likelihood of the recognition made by the character recognizing unit among the images to which the image converting unit
converts an extracted character image with different
conversion methods, and detects whether or not to
20 require the rotation, the rotational angle from the properly orientated character image to the input image if the rotation is required, and the mirror image flipping.
- (4) The character orientation detecting unit detects
25 only one image as a properly orientated image, if

there is the only one image having a predetermined or higher degree of likelihood of the recognition made by the character recognizing unit among the images to which the image converting unit converts an extracted character image with different conversion methods, and detects whether or not to require the rotation, the rotational angle if the rotation is required, and the mirror image flipping.

(5) The character orientation detecting unit detects as a properly orientated image the image which has the highest degree of likelihood of the recognition made by the character recognizing unit, and a character code corresponding thereto, which is not a predetermined character code, among the images to which the image converting unit converts an extracted character image with different conversion methods, and detects whether or not to require the rotation, the rotational angle from the properly orientated image to the input image if the rotation is required, and the mirror image flipping.

(6) The character orientation detecting unit detects as a properly orientated image an image type, which has the highest mean degree of likelihood of the recognition made by the character recognizing unit for character images within a line image among the

image types to which the image converting unit converts the character images within the line image with different conversion methods, and detects whether or not to require the rotation, the rotational angle from the properly orientated image to the input document image if the rotation is required, and the mirror image flipping.

(7) The character orientation detecting unit detects as a properly orientated image only one image type if there is the only one image type having the mean degree, which exceeds a predetermined value, of the likelihood of the recognition made by the character recognizing unit for character images within a line image, and detects whether or not to require the rotation, the rotational angle from the properly orientated image to the input document image if the rotation is required, and the mirror image flipping.

As described above, according to the present invention, by using the fact that the line orientation of, for example, an English document is horizontal only, the number of detection orientations of a character is reduced to one half of that of a Japanese character, an English character image is extracted according to the feature of the character image, and character recognition is used, so that the

orientation of the document image can be detected with high accuracy. Therefore, even if an English document is scanned in any of upward, downward, right, and left directions with a hand-held scanner, the input image can be automatically corrected to be a properly orientated image by correctly detecting the orientation of the document image. This significantly contributes to the operability of the document image correcting device, and the improvement of a user interface.

While the invention has been described with reference to the preferred embodiments thereof, various modifications and changes may be made to those skilled in the art without departing from the true spirit and scope of the invention as defined by the claims thereof.

What is claimed is:

1. A document image correcting device
correcting an input document image to be a properly
5 orientated image, comprising:

a line orientation determining unit determining
whether a line orientation of an input document image
is either vertical or horizontal;

a character image extracting unit extracting a
10 character image from the input document image;

a character orientation detecting unit detecting
whether or not to require a rotation, a rotational
angle if the rotation is required, and mirror image
flipping, which are intended for correcting the
15 character image extracted by said character image
extracting unit to be properly orientated, in
correspondence with a result of a determination made
by said line orientation determining unit; and

a document image correcting unit correcting the
20 input document image to be a properly orientated
document image based on a result of detection made by
said character orientation detecting unit.

2. The document image correcting device
25 according to claim 1, wherein:

said character orientation detecting unit further comprises

an image converting unit converting the character image extracted by said character image
5 extracting unit by rotating the character image, and
/or by flipping the character image to a mirror image, and

a character recognizing unit performing character recognition for the character image
10 converted by said image converting unit, and
outputting a character code and a degree of likelihood of the recognition; and

it is detected whether or not to require the rotation, the rotational angle if the rotation is
15 required, and the mirror image flipping, which are intended for correcting the extracted character image to be properly orientated, based on a result of the recognition performed by said character recognizing unit.

20

3. The document image correcting device according to claim 1, further comprising

a language identifying unit identifying a language of the input document image, wherein
25 the input document image is corrected to be a

properly orientated image in correspondence with a result of identification made by said language identifying unit.

5 4. The document image correcting device according to claim 1, wherein

 said character image extracting unit selects and extracts a character image a black pixel ratio of which is within a predetermined range.

10

 5. The document image correcting device according to claim 1, wherein

 said character image extracting unit selects and extracts a character image a ratio of a long side to
15 a short side of which is within a predetermined range.

 6. The document image correcting device according to claim 2, wherein

20 said character orientation detecting unit detects as a properly orientated character image an image having a highest degree of likelihood of the recognition performed by said character recognizing unit among the images to which said image converting
25 unit converts the extracted character image with

different conversion methods, and detects whether or not to require the rotation, the rotational angle from the properly orientated image to the input image if the rotation is required, and the mirror image
5 flipping.

7. The character image correcting device according to claim 2, wherein
if there is only one image having a
10 predetermined or higher degree of likelihood of the recognition performed by said character recognizing unit among the images to which said image converting unit converts the extracted character image with different conversion methods, said character
15 orientation detecting unit detects the only one image as a properly orientated image, and detects whether or not to require the rotation, the rotational angle from the properly orientated image to the input image if the rotation is required, and the mirror image
20 flipping.

8. The document image correcting device according to claim 2, wherein
said character orientation detecting unit
25 detects as a properly orientated image an image that

has a highest degree of likelihood of the recognition performed by said character recognizing unit, and a character code which correspond to the image and is not predetermined, among the images to which said
5 image converting unit converts the extracted image with different conversion methods, and detects whether or not to require the rotation, the rotational angle from the properly orientated image to the input image if the rotation is required, and
10 the mirror image flipping.

9. A document image correcting device correcting an input document image to be a properly orientated image, comprising:

15 a line orientation determining unit determining whether a line orientation of an input document image is either vertical or horizontal;

a line image extracting unit extracting a whole or a part of a line from the input document image as
20 a line image;

a character orientation detecting unit detecting whether or not to require a rotation, a rotational angle if the rotation is required, and mirror image flipping, which are intended for correcting a
25 character image within the line image extracted by

said line image extracting unit, in correspondence with a result of a determination made by said line orientation determining unit; and

5 a document image correcting unit correcting the input document image to be a properly orientated image based on a result of detection made by said character orientation detecting unit.

10 10. The document image correcting device according to claim 9, wherein:

said character orientation detecting unit further comprises

15 an image converting unit rotating the character image within the line image extracted by said line image extracting unit, and/or flipping the character image to a mirror image in correspondence with a result of a determination made by said line orientation determining unit, and

20 a character recognizing unit performing character recognition for the character image converted by said image converting unit, and outputting a character code corresponding to each character image within the line image, and a degree of likelihood of the recognition; and

25 it is detected whether or not to require the

rotation, the rotational angle if the rotation is required, and the mirror image flipping, which are intended for correcting the character image within the line image extracted by said line image extracting unit to be properly orientated, based on a result of the recognition performed by said character recognizing unit.

11. The document image correcting device according to claim 10, wherein said character orientation detecting unit detects an image type as a properly orientated image if the image type has a highest mean degree of likelihood of the recognition performed by said character image recognizing unit for the character image within the line image among image types to which said image converting unit converts the character image within the line image with different conversion methods, and if a preset number or more of predetermined character codes are not included among character codes corresponding to the character image within the line image, and detects whether or not to require the rotation, the rotational angle from the properly orientated image to the input document image if the rotation is required, and the mirror image

flipping.

12. The document image correcting device according to claim 10, wherein

5 said character orientation detecting unit detects as a properly orientated character image an image type having a highest mean degree of likelihood of the recognition performed by said character recognizing unit for the character image within the
10 line image among image types to which said image converting unit converts the extracted character image with different conversion methods, and detects whether or not to require the rotation, the rotational angle from the properly orientated image
15 to the input document image if the rotation is required, and the mirror image flipping.

13. The character image correcting device according to claim 10, wherein

20 said character orientation detecting unit detects only one image type as a properly orientated image if there is the only one image type having a predetermined or higher mean degree of likelihood of the recognition performed by said character
25 recognizing unit for the character image within the

line image among image types to which said image
converting unit converts the extracted character
image with different conversion methods, and detects
whether or not to require the rotation, the
5 rotational angle from the properly orientated image
to the input document image if the rotation is
required, and the mirror image flipping.

14. A document image correcting device
10 correcting an input document image to be a properly
orientated image, comprising:

a line orientation determining unit determining
whether a line orientation of an input document image
is either vertical or horizontal;

15 a character image extracting unit extracting a
character image from the input document image;

a character orientation detecting unit excluding
some of a plurality of patterns that include a
pattern of the character image within the input
20 document image, and patterns obtained by rotating the
character image and/or by flipping the character
image to a mirror image, and detecting whether or not
to require a rotation, a rotational angle if the
rotation is required, and mirror image flipping,
25 which are intended for correcting the character image

extracted by said character image extracting unit to be properly orientated, with the use of remaining patterns; and

5 a document image correcting unit correcting the input document image to be a properly orientated document image based on a result of detection made by said character orientation detecting unit.

10 15. A document image correcting method correcting an input document image to be a properly orientated image, comprising:

determining whether a line orientation of the input document image is either vertical or horizontal;

15 detecting whether or not to require a rotation, a rotational angle if the rotation is required, and mirror image flipping, which are intended for correcting a character image extracted from the input document image to be properly orientated, in
20 correspondence with a result of a determination; and

correcting the input document image to be a properly orientated document image based on a result of detection.

25 16. A computer-readable storage medium for use

in a document image correcting device correcting an input document image to be a properly orientated image, on which is recorded a program for causing a computer to perform a process, said process comprising:

determining whether a line orientation of the input document image is either vertical or horizontal;

detecting whether or not to require a rotation, a rotational angle if the rotation is required, and mirror image flipping, which are intended for correcting a character image extracted from the input document image to be properly orientated, in correspondence with a result of a determination; and

correcting the input document image to be a properly orientated document image based on a result of detection.

17. A document image correcting device correcting an input document image to be a properly orientated image, comprising:

line orientation determining means for determining whether a line orientation of an input document image is either vertical or horizontal;

character image extracting means for extracting

a character image from the input document image;

character orientation detecting means for
detecting whether or not to require a rotation, a
rotational angle if the rotation is required, and
5 mirror image flipping, which are intended for
correcting the character image extracted by said
character image extracting means to be properly
orientated, in correspondence with a result of a
determination made by said line orientation
10 determining means; and

document image correcting means for correcting
the input document image to be a properly orientated
document image based on a result of detection made by
said character orientation detecting means.

Abstract of the Disclosure

A line orientation determining unit determining whether the line orientation of an input document image is either vertical or horizontal, a character image extracting unit extracting a character image from the input document image, a character orientation detecting unit detecting whether or not to require a rotation, a rotational angle if the rotation is required, and mirror image flipping, which are intended for correcting the extracted character image to be properly orientated, in correspondence with the result of the determination made by the line orientation determining unit, and a document image correcting unit correcting the input document image to be properly orientated based on the result of the detection made by the character orientation detecting unit are comprised. With these units, a scanned image is automatically corrected to be a properly orientated image, even if a document such as an English document image the text of which is horizontally written in normal cases is scanned in any of upward, downward, right, and left directions, is scanned, for example, with the use of a hand-held scanner.

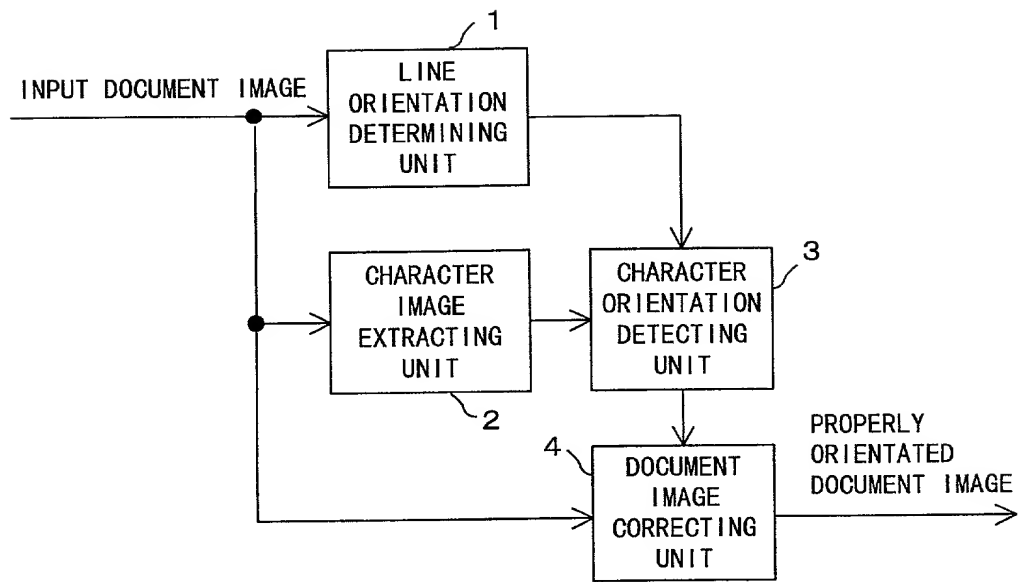


FIG. 1


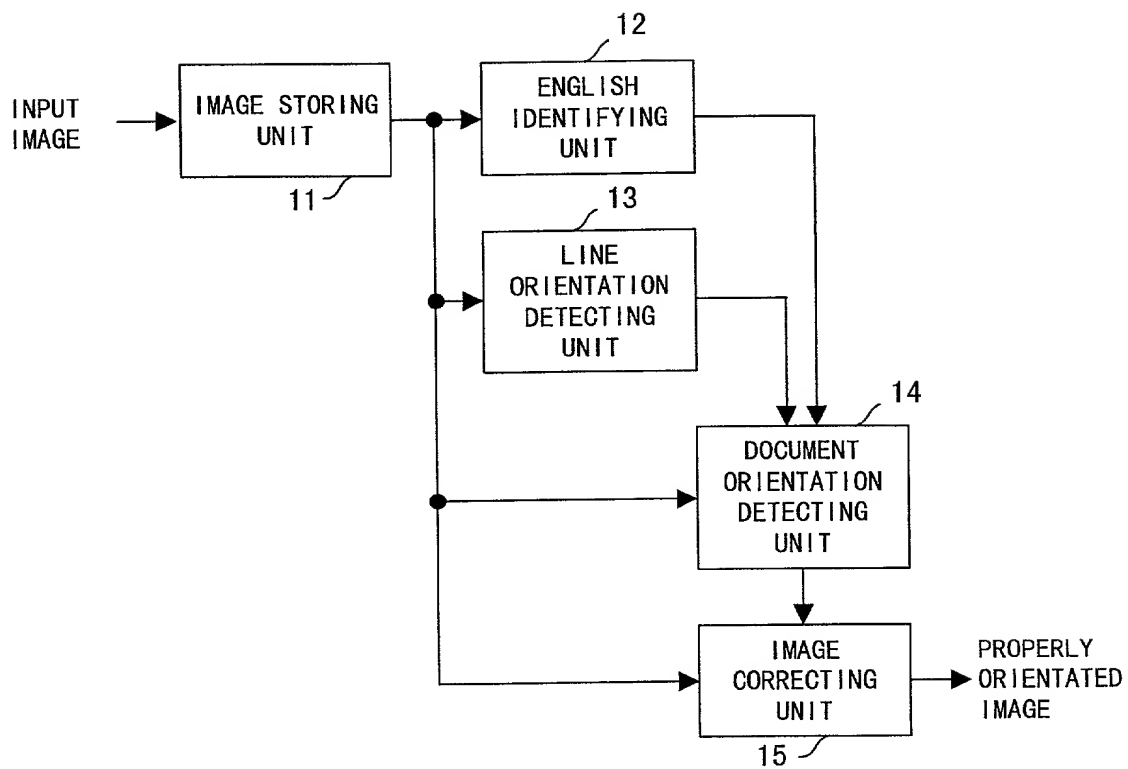


FIG. 2

SHEET
OF PAPER

SCANNER HEAD

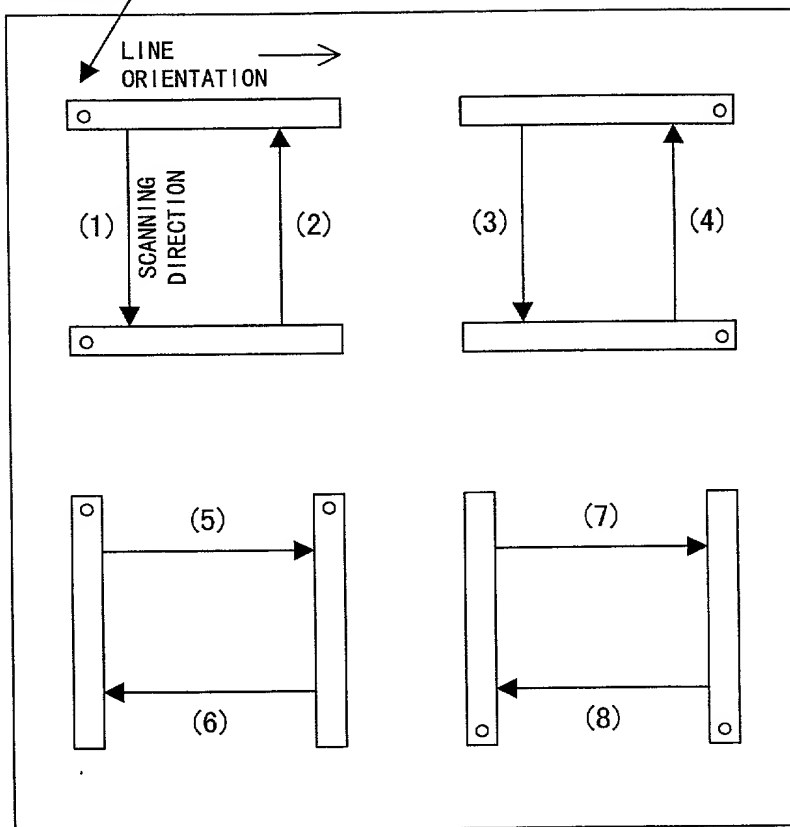

F I G . 3

(1)



PROPERLY
ORIENTATED

(2)



ROTATED BY
180 DEGREES
AND FLIPPED
TO MIRROR
IMAGE

(3)



FLIPPED TO
MIRROR
IMAGE

(4)



ROTATED BY
180 DEGREES

(5)




ROTATED BY
90 DEGREES
AND FLIPPED
TO MIRROR
IMAGE

(6)



ROTATED BY
270 DEGREES

(7)



ROTATED BY
90 DEGREES

(8)



ROTATED BY
270 DEGREES
AND FLIPPED
TO MIRROR
IMAGE

FIG. 4

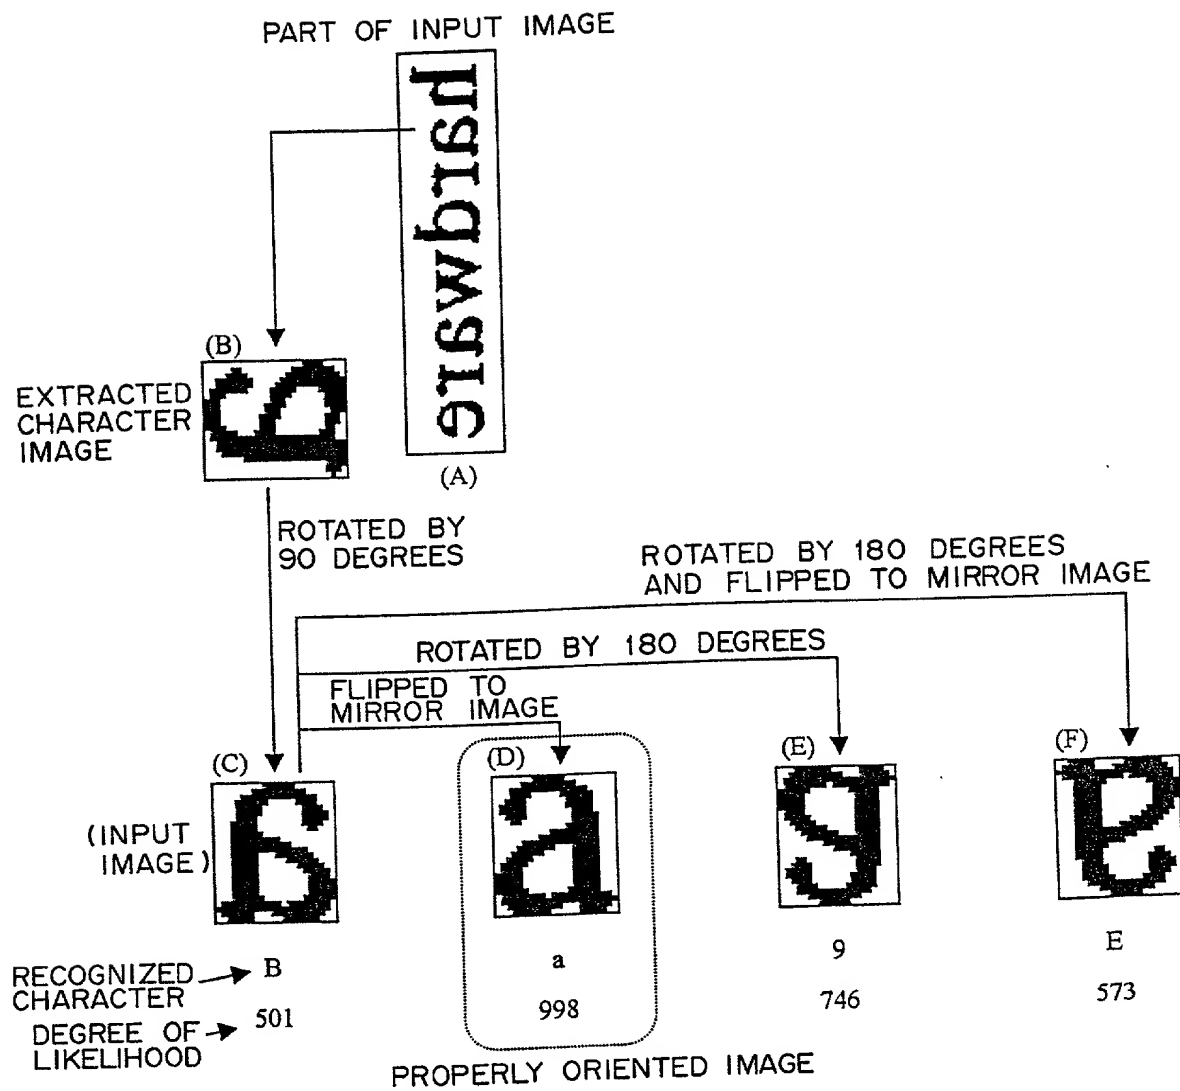


FIG. 5

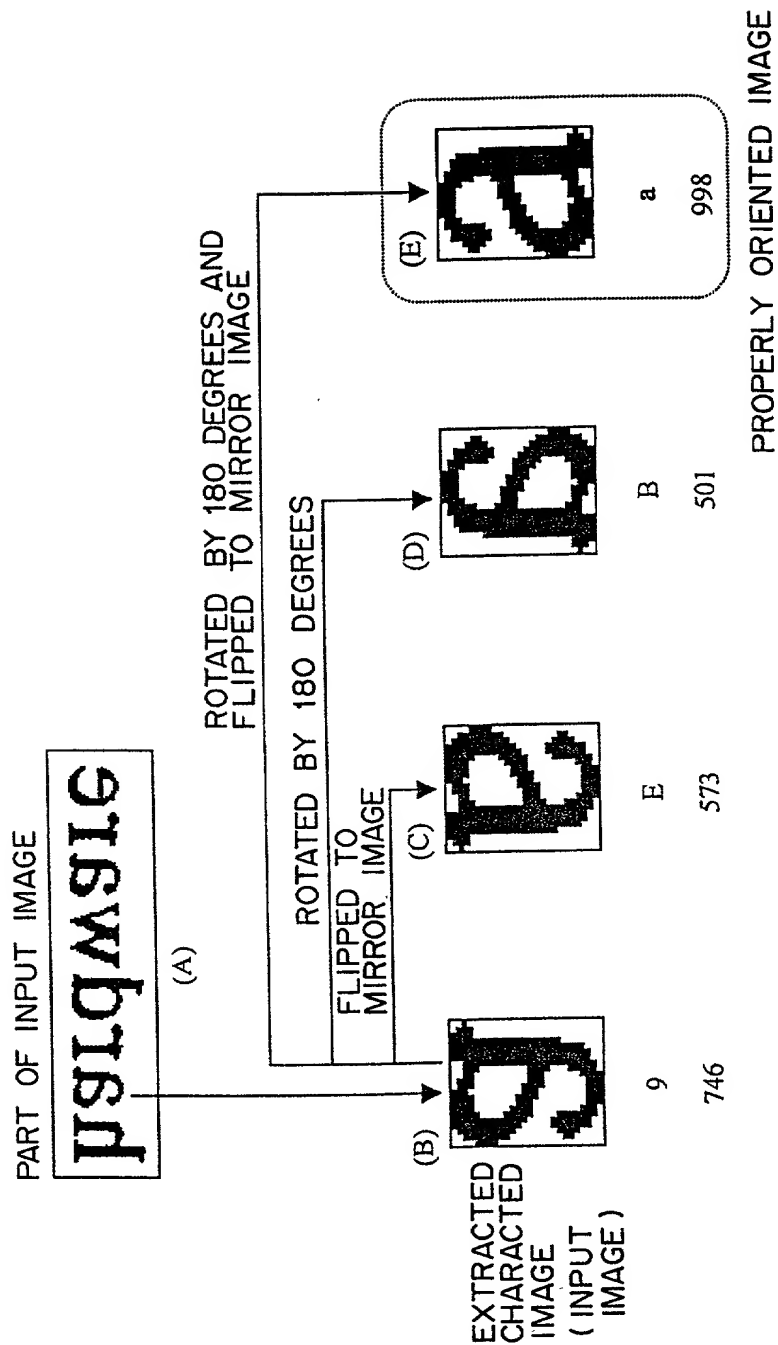


FIG. 6

```
graph TD; START([START]) --> S1[S1: DETERMINING WHETHER OR NOT INPUT IMAGE IS ENGLISH DOCUMENT]; S1 --> S2{S2: ENGLISH DOCUMENT IMAGE?}; S2 -- No --> S3[S3: PERFORMING PROCESS FOR AUTOMATICALLY CORRECTING ENGLISH DOCUMENT IMAGE]; S2 -- Yes --> S3; S3 --> END([END]);
```

The flowchart illustrates the process for correcting an English document image. It begins with a 'START' terminal, followed by a process block 'S1' labeled 'DETERMINING WHETHER OR NOT INPUT IMAGE IS ENGLISH DOCUMENT'. This leads to a decision diamond 'S2' labeled 'ENGLISH DOCUMENT IMAGE?'. If the answer is 'No', the flow proceeds to process block 'S3' labeled 'PERFORMING PROCESS FOR AUTOMATICALLY CORRECTING ENGLISH DOCUMENT IMAGE'. If the answer is 'Yes', the flow also proceeds to 'S3'. Finally, the process concludes at an 'END' terminal.

FIG. 7

START

$$j = 0$$

S 11

DETECTING RECTAGULAR AREA OF i-TH CHARACTER IMAGE WITHIN INPUT IMAGE

S12

OBTAINING BLACK PIXEL RATIO
Bi, CHARACTER WIDTH Wi, AND
INTERVAL Si TO NEXT CHARACTER
OF CHARACTER IMAGE

LS13

++

-S 14

No

$$j = M$$

S15

Yes

CALCULATING RESPECTIVE MEAN
VALUES Ba, Wa, AND Sa OF Bi,
Wi, AND Si

S 16

$$n = 0$$

- S 17

$$Ba \geq TH_B ?$$

Yes

n++

S20-

$$W_a \leq TH_W?$$

Yes

S21

No

n++

S22.

$$Sg \leq TH - S?$$

Yes

,S23

No

n++

S24

 $n \geq 2$?

No

S25.

LANGUAGE = "ENGLISH"?

LANGUAGE = "NOT ENGLISH"?

END

FIG. 8



FIG. 9

| | CHARACTER INTERVAL | CHARACTER WIDTH | BLACK PIXEL RATIO |
|-------------------------|--------------------|-----------------|-------------------|
| ENGLISH DOCUMENT IMAGE | 3 PIXELS | 26 PIXELS | 48 % |
| JAPANESE DOCUMENT IMAGE | 5 PIXELS | 39 PIXELS | 36 % |
| THRESHOLD VALUE | 4 PIXELS | 33 PIXELS | 42 % |

(MEAN VALUES)

FIG. 10

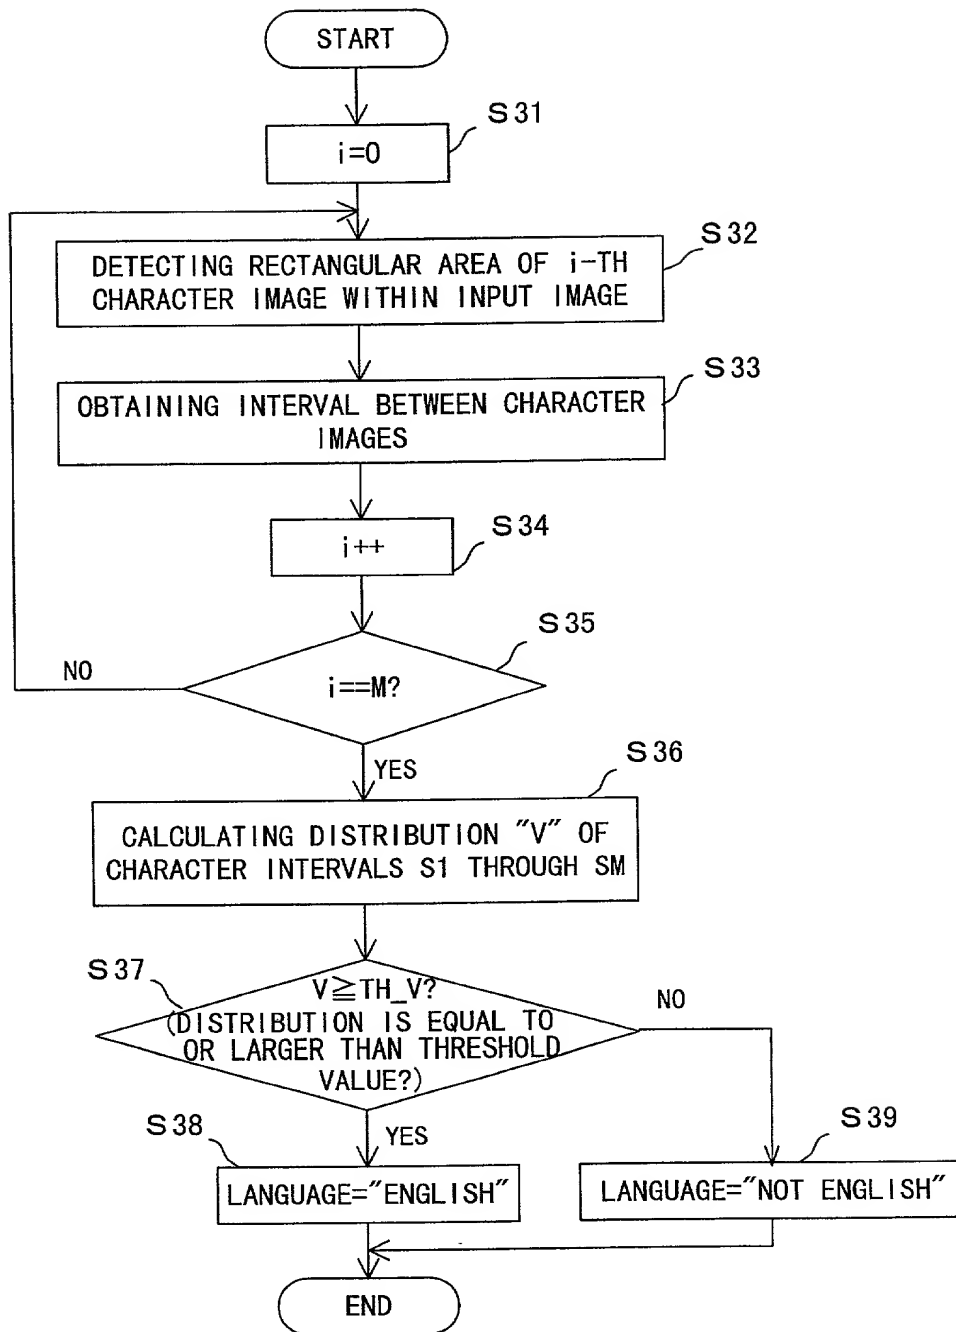


FIG. 11

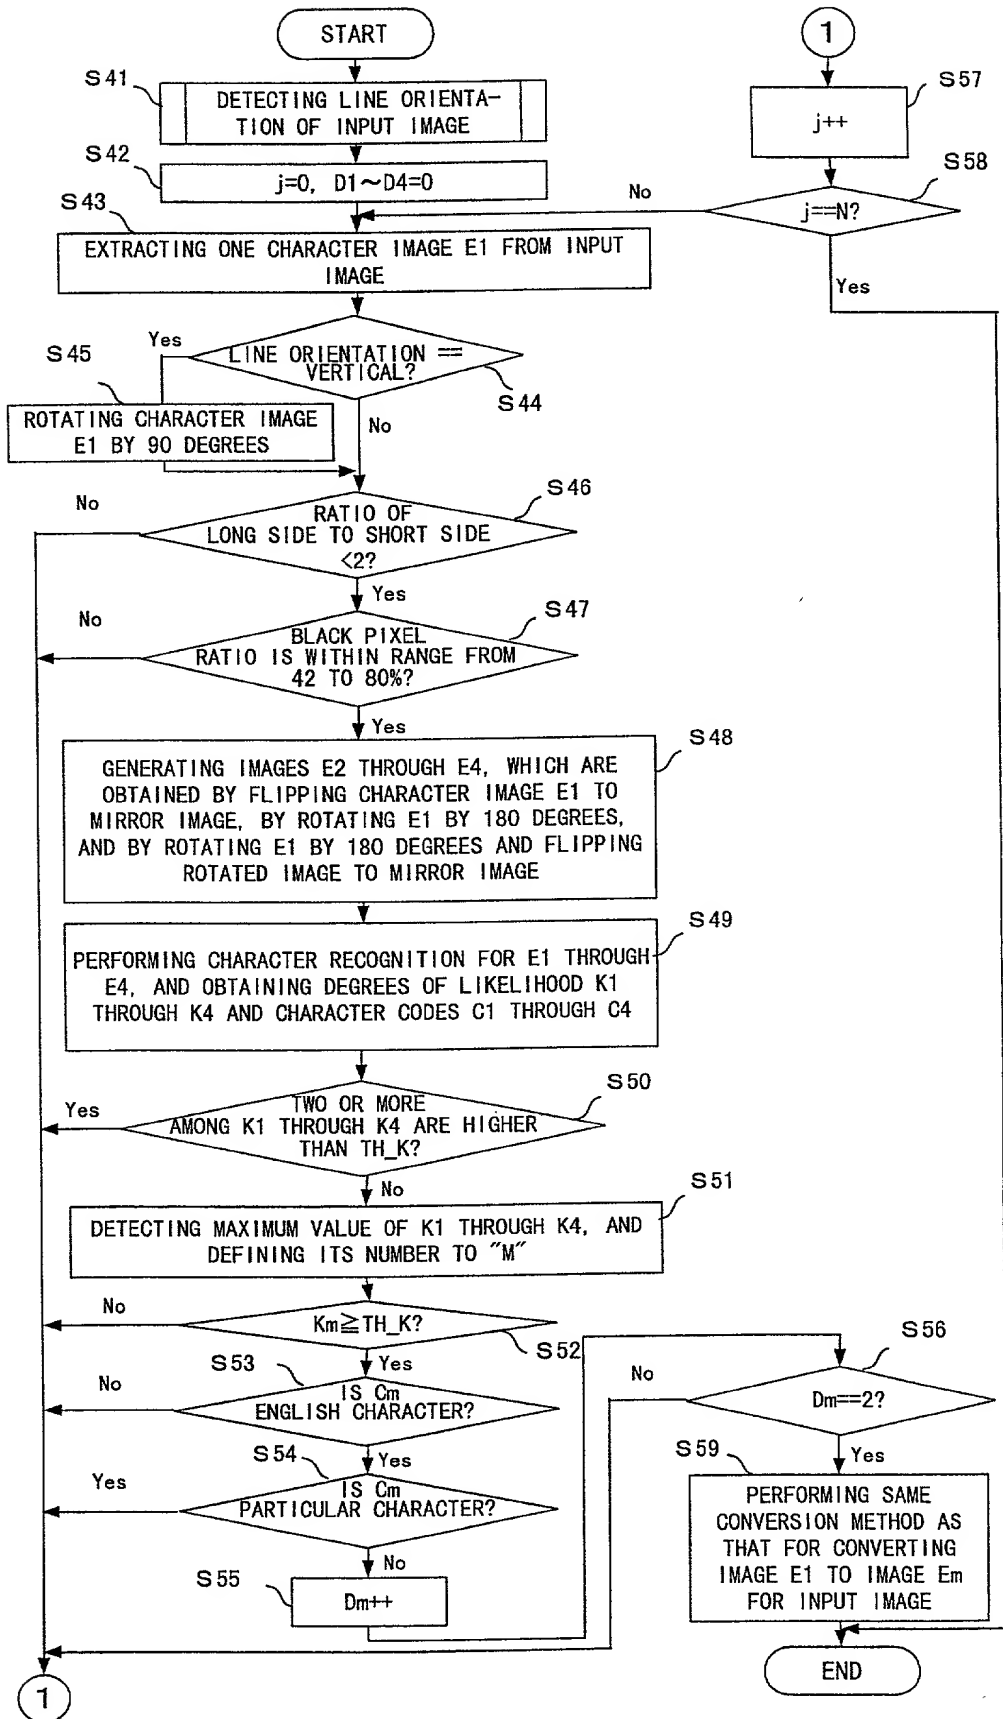


FIG. 12

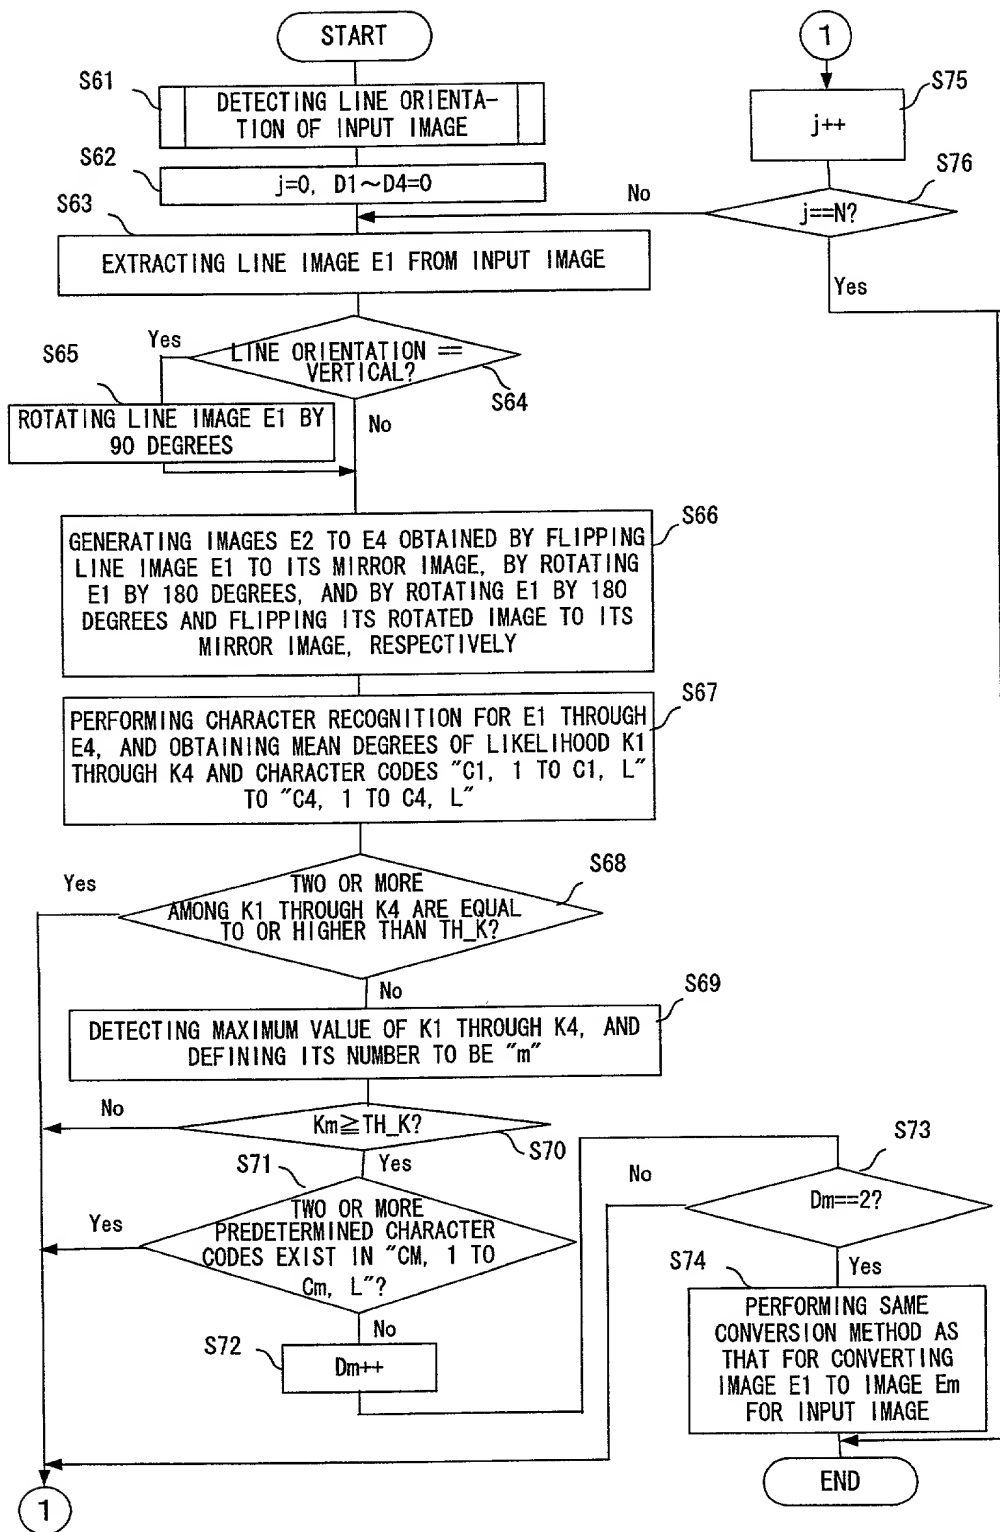


FIG. 14

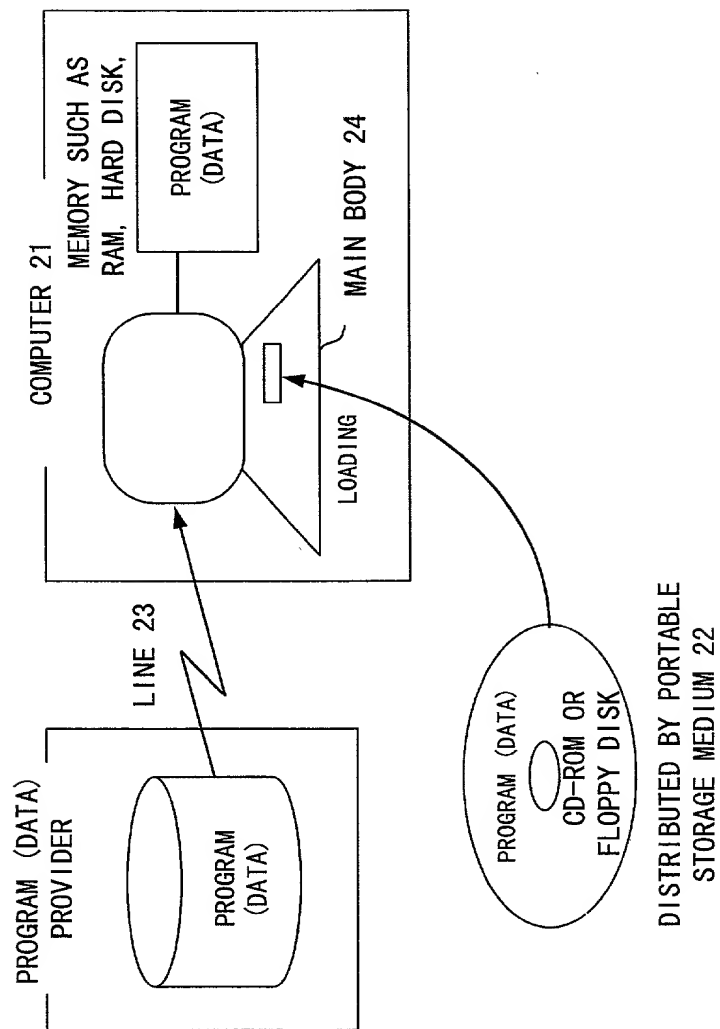


FIG. 15

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

DOCUMENT IMAGE CORRECTING DEVICE

AND A CORRECTING METHOD

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約
国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、
内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of
the above identified specification, including the claims, as
amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されると
おり、特許資格の有無について重要な情報を開示する義務が
あることを認めます。

I acknowledge the duty to disclose information which is material to
patentability as defined in Title 37, Code of Federal Regulations,
Section 1.56.

Page 1 of 3

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一ヶ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-216050

(Number)
(番号)

Japan

(Country)
(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

30th/July/1999

(Day/Month/Year Filed)
(出願年月日)

☐

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願年月日)

☐

私、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入子された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 346(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.54 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入子した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
 手続を米特許商標局に対して遂行する弁護士または代理人
 として、下記の者を指名いたします。(弁護士、または代理人
 の氏名及び登録番号を明記のこと)

James D. Halsey, Jr., 22,729; Harry John Staats, 22,010; David M. Pücher, 25,908; John C. Garvey, 28,607; J. Randall Beckers,
 30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D.
 Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Markette, 35,269; Harlan B. Williams, Jr., 34,756;
 George N. Stevens, 36,938; Michael C. Soldner, 41,455; Norman L. Ourada, 41,235; Kevin R. Spivak, P-43,148; and William M.
 Schertler, 35,348 (agent)

書類送付先

POWER OF ATTORNEY: As a named inventor, I hereby appoint
 the following attorney(s) and/or agent(s) to prosecute this
 application and transact all business in the Patent and Trademark
 Office connected therewith (list name and registration number)

Send Correspondence to:

STAAS & HALSEY
 700 Eleventh Street, N.W.
 Suite 500
 Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
 (202) 434-1500

| | | | |
|-------------|--|---|----------------------|
| 唯一または第一発明者名 | Full name of sole or first inventor Kenichiro SAKAI | | |
| 発明者の署名 | 日付 | Inventor's signature <i>Kenichiro Sakai</i> | Date June 1, 2000 |
| 住所 | Residence Kanagawa, Japan | | |
| 国籍 | Citizenship Japan | | |
| 私書箱 | Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan | | |
| 第二共同発明者 | Full name of second joint inventor, if any Tsugio NODA | | |
| 第二共同発明者 | 日付 | Second inventor's signature <i>Tsugio Noda</i> | Date June 1, 2000 |
| 住所 | Residence Kanagawa, Japan | | |
| 国籍 | Citizenship Japan | | |
| 私書箱 | Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan | | |

(第三以降の共同発明者についても同様に記載し、署名をす
 ること)

(Supply similar information and signature for third and subsequent
 joint inventors.)